



\*) positional accuracy between fits:  $\pm 0.02$

- 1)  $\varnothing 4H7$ ; depth 5 (2x)
- 2) M5; depth 8 (4x)
- 3) M4; depth 6 (2x)
- 4) M5; depth 8 (4x)
- 5) M5; depth 8 (4x)
- 6) counterbore for screw DIN 912 / ISO 4782  
M5 (4x) used from bottom-side
- 7) terminal (number and types of connectors  
depending on selected equipment)

requirement on mounting surfaces: flatness 0.05 mm

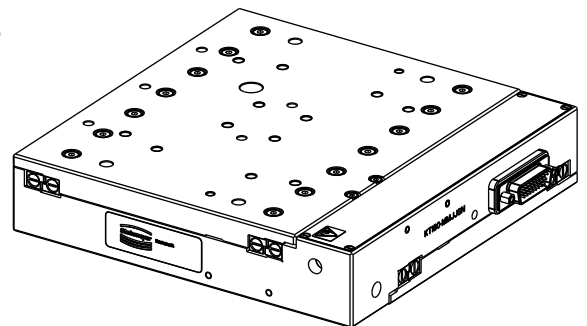

drawingscale: 3:10  
metric system (mm)

Revision 10/2021  
Doc-Nr. 346881